

DELUXE EMBERGLO™ GAS FIREPLACE INSERTS



NEVER BE COLD AGAIN!




*This 616 Deluxe is shown with the
Times Square™ Face, Black Glass Fireback,
and Birch Logs*

The Right Fireplace Insert Company For You

"For more than forty years, we have been passionate about the science and art behind making beautiful fireplace inserts for homes in North America. We utilize the finest materials and subject them to vigorous testing standards to make fireplace inserts that stand up to the rigors of time.

These fireplace inserts are the best money can buy. We have a worldwide reputation for award-winning innovations in fireplace insert design, and yet the most significant recognition to me is when a family entrusts us to be their fireplace insert of choice.

Take your time, enjoy looking through this catalog and keep the home fires burning."

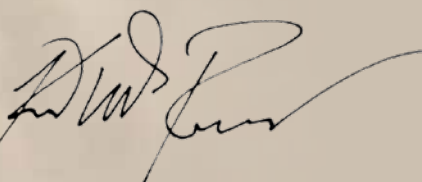

Kurt W. F. Rumens,
President & Director of Product Design
Travis Industries, House of Fire



Cover image: The 34 DVL Deluxe is shown with the Cast Iron Boston™ Face, Black Glass Fireback, and Birch Logs.

All Fireplace Inserts Are Not Created Equal

There are a lot of nice fireplace inserts out there that you might like. Allow us to introduce you to the greatest gas inserts in the world. We know you'll find one that you are going to love!

Lopi® offers four extraordinary models of premium gas burning fireplace inserts. While every one of these fireplace inserts embody the same attention to detail in design and construction, each model is quite unique. Sizing and heating capacity range from medium to large heaters.

Beauty Is Not Optional

We make the most beautiful, elegant fireplace inserts in the world. Our models feature a wide array of designer faces and firebacks to choose from, along with high definition log set options. Our attention to detail is second to none and our gas inserts provide the most realistic, wood-like fires available. When you purchase a Lopi®, you are not only getting an efficient heater, but a stunning statement piece for your home.

Incredible Performance

All of our insert models are excellent home heaters designed to provide radiant heat through the large fireviewing glass and natural convection through the heat exchanger. Incredible turndown rates and high efficiencies make these some of the most efficient gas burning inserts in the world.

No Power? No Problem!

All Lopi® fireplace inserts will work in a power outage.

Innovations

We are known the world over to be the most creative group of innovators and designers, bringing life to innovations such as:

- Ember-Fyre® II
- Ember-Glo™
- GreenSmart®
- Comfort Control™

MID-SIZED FIREPLACE INSERT PAGES 6-9



32 DVS DELUXE

The 32 DVS has the smallest footprint of our mid-sized models, and is our 'go-to' insert for fitting into almost any fireplace.

31,000 BTUs



430 DELUXE

This Deluxe model features a large ceramic glass viewing area that extends down to the hearth.

31,000 BTUs

LARGE FIREPLACE INSERTS - PAGES 10-13



34 DVL DELUXE

This model is the larger counterpart to the 32 DVS.

40,000 BTUs



616 DELUXE

The 616 features our biggest fireview, with up to 20% more glass than other large inserts its size.

39,000 BTUs

NOTE: "Deluxe" insert models include the GreenSmart® Remote Control, quiet Convection Fan and Accent Lights.

New Ember-Fyre® II Burner Featuring 30% More Visual Fire!

Inspired by our popular award-winning Ember-Fyre® Burner, the new Ember-Fyre® II offers the next generation of high definition, wood-like burner technology. This stadium style burner features Ember-Glo™ ember bed lighting and multiple levels of dancing flames, to give you 30% more visual fire than any other insert brand with the same BTUs! Just like our original Ember-Fyre® Burner, Ember-Fyre® II provides a realistic looking fire with incredible attention to detail that makes it hard to distinguish from a wood burning fire.



EMBER-GLO™

AN INSERT FOR EVERY FIREPLACE




Turn Your Fireplace Into An Efficient Heat Source

Lopi® gas inserts allow you to enjoy a gorgeous, glowing fire without losing heat out of your chimney. These inserts are designed to transform virtually any masonry or zero clearance (metal) fireplace into an efficient source of heat. Traditional, open fireplaces can have efficiency ratings as low as 15%, and depending on the condition, can actually draw the heat out of your home for a net heat loss. Our heater-rated gas inserts achieve steady state efficiency ratings as high as 87%.

All Lopi® Gas Inserts Feature Direct Venting

All Lopi® Premium Gas Inserts feature an efficient co-linear direct venting system. This dual-liner system allows for direct venting through an existing masonry chimney with one liner to vent exhaust and the other liner to provide combustion air and maintain indoor air quality.

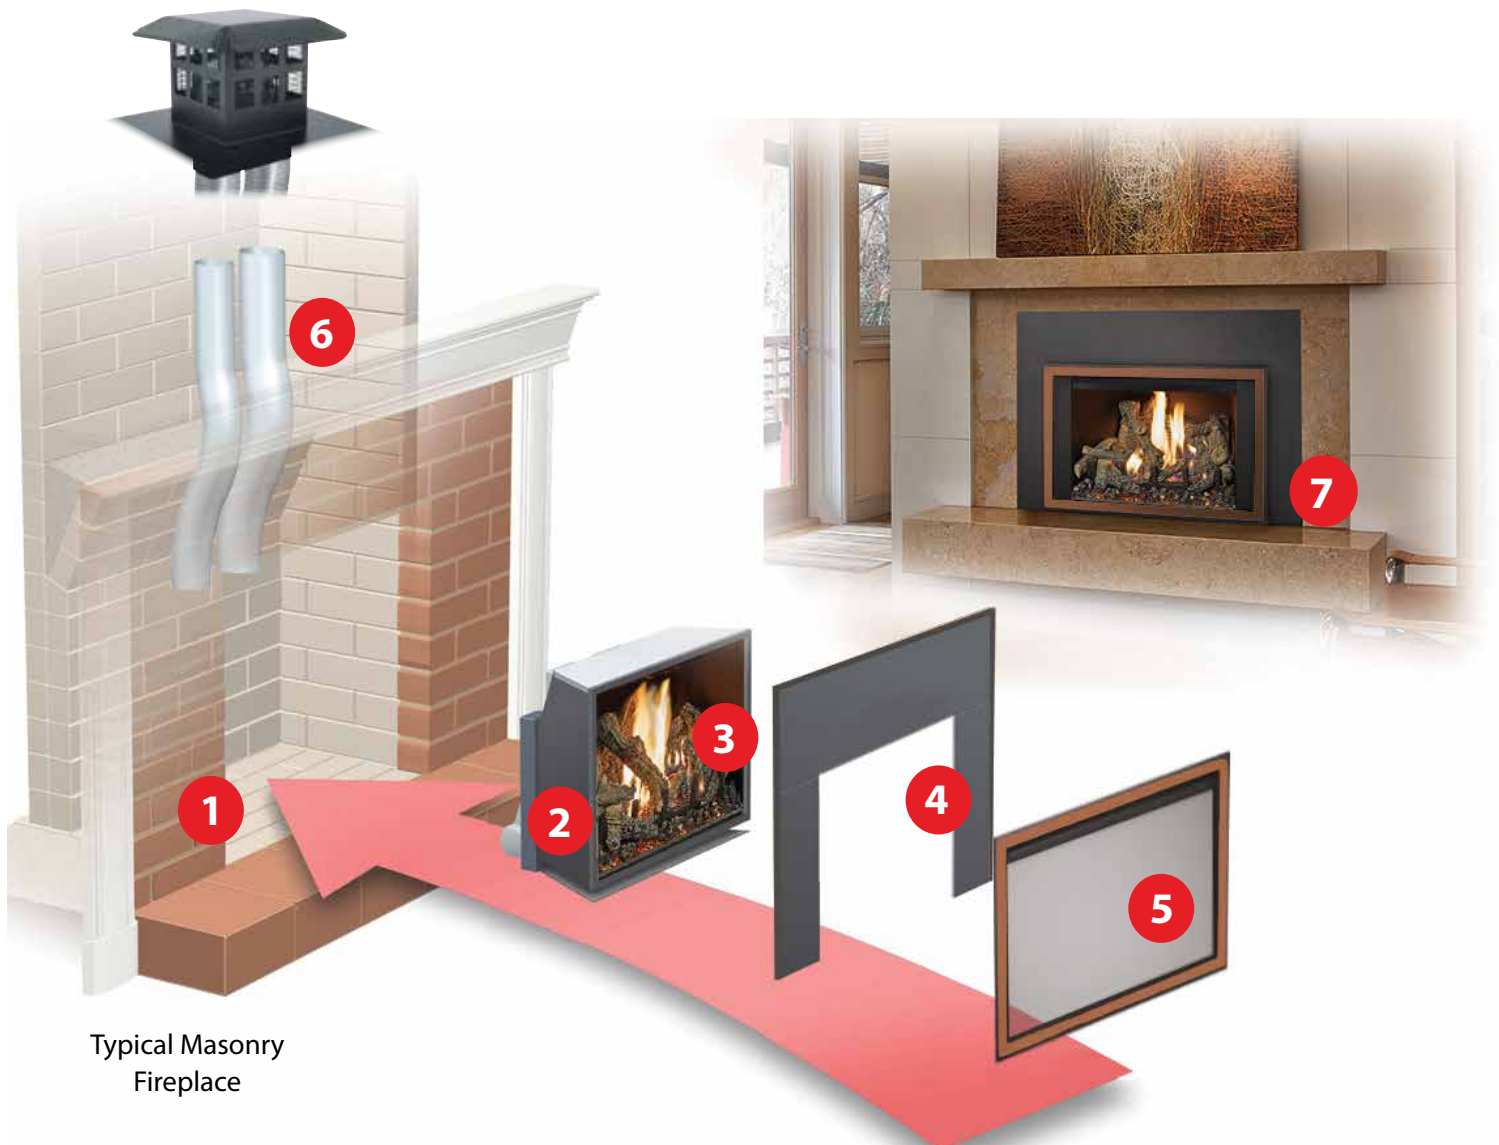

Typical Masonry
Fireplace

1

Measure Your Existing
Masonry or Metal
(Zero Clearance)
Fireplace

2

Select the Insert
That Best Fits Your
Fireplace

3

Choose
A Log Set

4

Select
A Finish
Panel

5

Pick One of
the Designer
Faces

6

Add the
Co-Linear
Direct Vent
Chimney

7

Enjoy
the Heat!



*Shown with Times Square™ Face,
GreyStone Fireback, and Birch Logs*

32 DVS DELUXE WITH EMBER-GLO™



Traditional 1,500 Square Foot Heater

The 32 DVS Deluxe is an efficient way to heat homes and living spaces up to 1,500 square feet. This mid-sized insert features a big ceramic glass viewing area, the incredible Ember-Fyre® II Burner and Comfort Control™, which allows you to turn down the heat output while maintaining the beauty of the fire. This model offers you the choice of high definition detailed log sets and a wide variety of designer faces. The 32 DVS Deluxe comes standard with our most popular features, namely, an adjustable top Accent Light, a 180 CFM convection fan, Ember-Glo™ ember bed lighting and the GreenSmart® Remote Control.


Insert Choices *See Pages 14-17*

- Wide array of designer faces
- Choice between Classic Oak Logs, Birch Logs or Driftwood Fyre-Art™
- Six optional fireback choices
- Choice of small and large one-piece panels. Custom fit panels are also available.
- Optional Hidden Wiring Kit allows you to hard wire the insert from within the firebox

Specifications

Heating Capacity:	Up to 1,500 Square Feet
Maximum BTU/HR Input:	31,000 (NG/LP)
Minimum BTU/HR Input:	11,300 (NG), 9,600 (LP)
Turn Down Ratio:	64% (NG), 69% (LP)
Steady State Efficiency:	Up To 85.11% (NG), 87.44% (LP)
P4 Canadian Efficiency:	75.22% (NG), 77.93% (LP)
Dimensions:	Height 19-5/8" (Front), 17" (Back) Width 26-3/8" (Front), 17-5/8" (Back) Depth 15-1/8"
Glass Viewing Area:	24-1/4" W x 12-3/4" H= 309 Sq. In.

Clearances To Combustibles & Hearth Protection

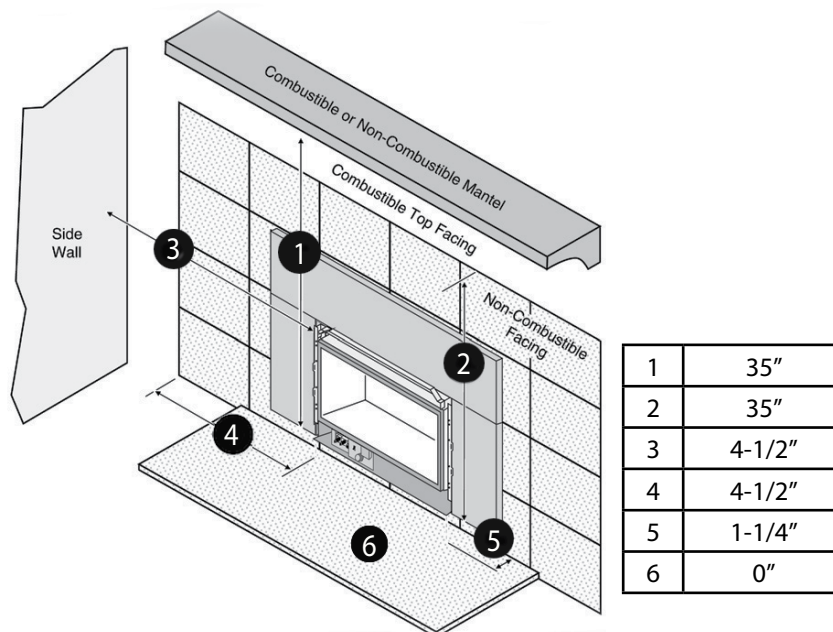



Shown with the Profile™ Stainless Steel Face, Black Glass Fireback, and Driftwood Log Set

430 DELUXE WITH EMBER-GLO™



9

MID-SIZED GAS INSERTS

Traditional 1,500 Square Foot Heater with Large Viewing Area

The 430 Deluxe is a beautiful insert that is ideal for providing supplemental heat to homes or living spaces up to 1,500 square feet. Featuring 430 square inches of ceramic glass, this model has a larger fireview than most inserts its size. The ceramic glass extends down to the hearth to offer a “clean face” look that resembles a traditional masonry fireplace. This model features Ember-Glo™ ember bed lighting, the Ember-Fyre®II burner and Comfort Control™ to accommodate your year-round heating requirements. More standard features include the GreenSmart® Remote Control, top Accent Light and a 180 CFM convection fan.


Insert Choices *See Pages 14-17*

- Wide array of designer faces
- Choice between Classic Oak Logs, Birch Logs or Driftwood Fyre-Art™
- Five fireback choices (required)
- Choice of small and large one-piece panels. Custom fit panels are also available.
- Optional Hidden Wiring Kit allows you to hard wire the insert from within the firebox

Specifications

Heating Capacity:	Up to 1,500 Square Feet
Maximum BTU/HR Input:	31,000 (NG/LP)
Minimum BTU/HR Input:	9,900 (NG), 7,500 (LP)
Turn Down Ratio:	68% (NG), 76% (LP)
Steady State Efficiency (High):	Up To 85.55% (NG), 86.50% (LP)
P4 Canadian Efficiency:	73.77% (NG), 74.73% (LP)
Dimensions:	Height 19-1/2" Width 29-1/2" (Front), 21" (Back), Depth 15"
Glass Viewing Area:	23" W x 16" H = 368 Sq. In.

Clearances To Combustibles & Hearth Protection

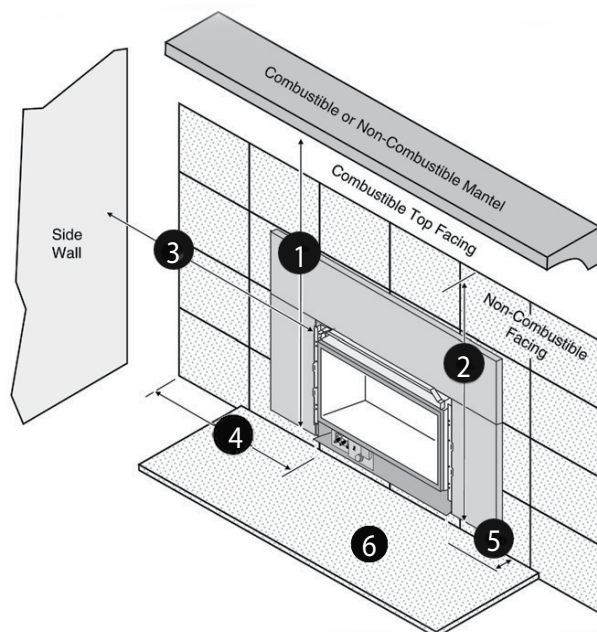

1	34-1/2" = 12" Mantle Depth 33-1/2" = 4" Mantle Depth
2	32-3/8"
3	5"
4	3-3/8"
5	1-1/4"
6	0"



*Shown with the Wilmington™ Black
Painted Face, Common Brick Fireback,
and Classic Oak Logs*

34 DVL DELUXE WITH EMBER-GLO™



Traditional 2,000 Square Foot Heater

The DVL Deluxe is our most popular gas insert and can heat up to 2,000 square feet. This model offers a generous ceramic glass viewing area and your choice of high definition log sets and designer faces. Comfort Control™ is a standard feature on this unit, which allows you to turn down the heat output while maintaining an attractive flame appearance. This Deluxe insert comes fully loaded with the Ember-Fyre® II Burner, realistic Ember-Glo™ ember bed lighting, GreenSmart® Remote Control, an adjustable top Accent Light and 180 CFM convection fan.


Insert Options *See Pages 14-17*

- Wide array of designer faces
- Choice between Classic Oak Logs, Birch Logs or Driftwood Fyre-Art™
- Six optional fireback choices
- Choice of small and large one-piece panels. Custom fit panels are also available.
- Optional Hidden Wiring Kit allows you to hard wire the insert from within the firebox

Specifications

Heating Capacity:	Up to 2,000 Square Feet
Maximum BTU/HR Input:	40,000 (NG/LP)
Minimum BTU/HR Input:	13,500 (NG), 9,600 (LP)
Turn Down Ratio:	64% (NG), 76% (LP)
Steady State Efficiency (High):	Up To 82.17% (NG), 83.81% (LP)
P4 Canadian Efficiency:	70.30% (NG), 72.81% (LP)
Dimensions:	Height 23-7/8" (Front), 21-3/8" (Back) Width 31-1/2" (Front), 20" (Back) Depth 14-1/2"
Glass Viewing Area:	27" W x 16-1/8"H = 437 Sq. In.

Clearances To Combustibles & Hearth Protection

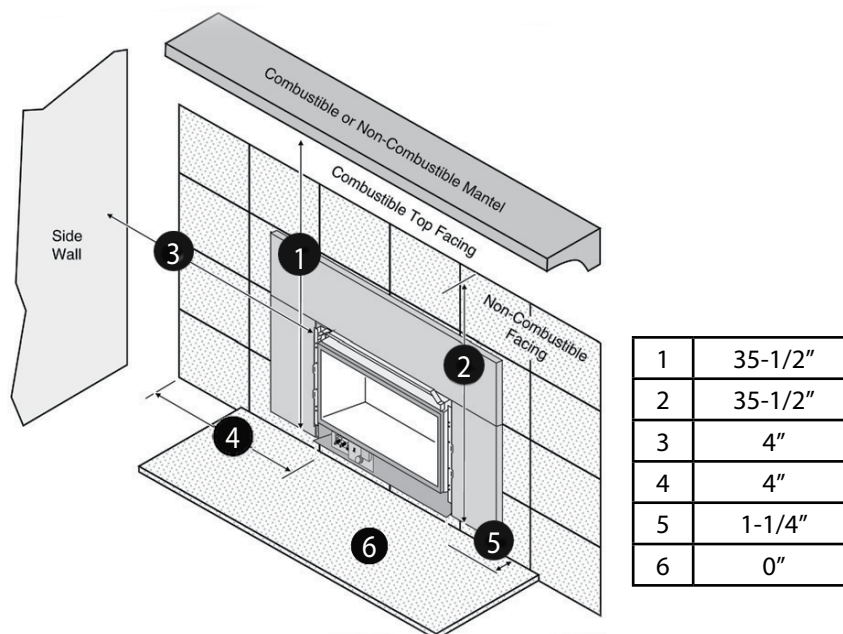



616 shown with
Profile™ Bronze Painted Face,
Black Painted Fireback, and
Classic Oak Logs

616 DELUXE WITH EMBER-GLO™



Traditional 2,000 Square Foot Heater with Large Viewing Area

The 616 Deluxe is an excellent heater and beautiful focal point for larger homes and grand spaces up to 2,000 square feet. This insert features our biggest fireview, with 616 square inches of ceramic glass that extends down to the hearth. This creates a “clean face” look with minimal metal facing and a larger fireview than other inserts its size. This model has a gorgeous flame appearance and comes standard with Ember-Glo™ ember bed lighting and the Ember-Fyre® II burner. The 616 also features a 180 CFM convection fan, the GreenSmart® Remote Control, top Accent Light and Comfort Control™, which gives you the flexibility to enjoy a beautiful fire with your desired heat output all year-round.


Insert Choices *See Pages 14-17*

- Wide array of designer faces
- Choice between Classic Oak Logs, Birch Logs or Driftwood Fyre-Art™
- Five fireback choices (required)
- Choice of small and large one-piece panels. Custom fit panels are also available.
- Optional Hidden Wiring Kit

Specifications

Heating Capacity:	Up to 2,000 Square Feet
Maximum BTU/HR Input:	39,000 (NG/LP)
Minimum BTU/HR Input:	12,000 (NG), 9,000 (LP)
Turn Down Ratio:	69% (NG), 77% (LP)
Steady State Efficiency (High):	Up To 83.88% (NG), 85.39% (LP)
P4 Canadian Efficiency:	71.19% (NG), 73.04% (LP)
Dimensions:	Height 23-5/16"
	Width 34" (Front), 24" (Back),
	Depth 16"
Glass Viewing Area:	27-3/4" W x 19-3/4" H = 543 Sq. In.

Clearances To Combustibles & Hearth Protection

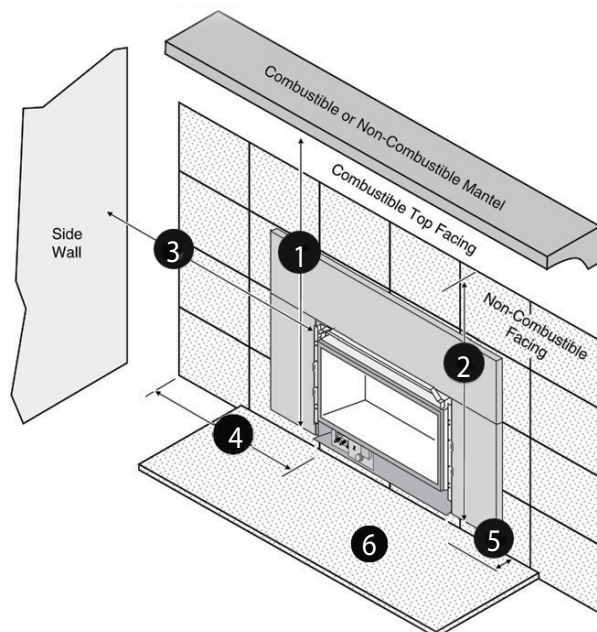

1	36-1/2" = 12" Mantle Depth 33" = 4" Mantle Depth
2	35-1/2"
3	6"
4	5"
5	1-1/4"
6	0"




FACE OPTIONS FOR ALL MODELS

NOTE: All face heights are measured from the bottom of the units to the top of the face.



32 DVS and 34 DVL
Face Design
Black Painted

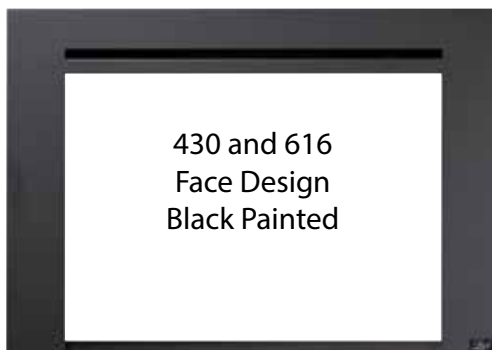

430 and 616
Face Design
Black Painted

TIMES SQUARE™ FACE

These faces require Finish Panels.

32 DVS - 31-1/8" W x 20-1/2" H

34 DVL - 34" W x 24-1/2" H

430 - 31-1/8" W x 22" H

616 - 35-1/2" W x 25-3/4" H

PROFILE™ FACES

Profile faces require Finish Panels as shown in photos.

32 DVS - 31-1/8" W x 20-1/2" H


34 DVL - 34" W x 24-1/2" H

430 - 31-1/8" W x 20-1/2" H

616 - 35-3/4" W x 24-3/8" H



Black Painted

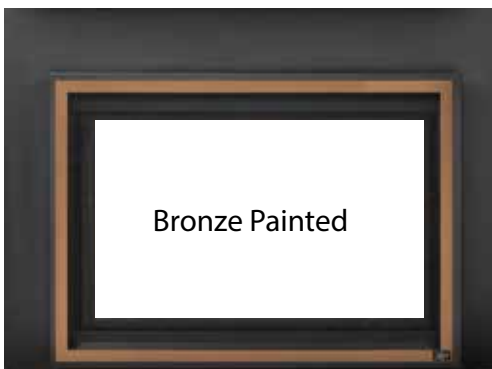


Bronze Painted



Stainless Steel

WILMINGTON™ FACES

These faces require Finish Panels.

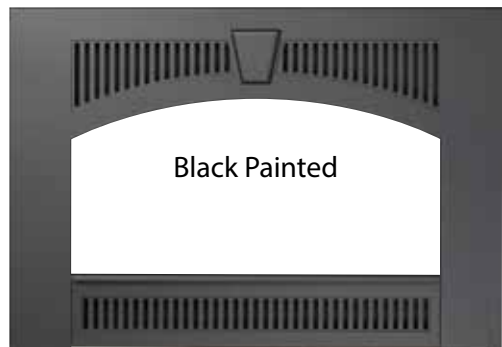

Black Painted



Hand-Rubbed
Carbon Patina




(DVL ONLY)
Cast Iron Face
Black Painted

32 DVS and 34 DVL Wilmington™ Face Design:

32 DVS - 32 1/4" W x 22 1/2" H

34 DVL - 36" W x 27" H

34 DVL - 36-1/4" W x 25" H

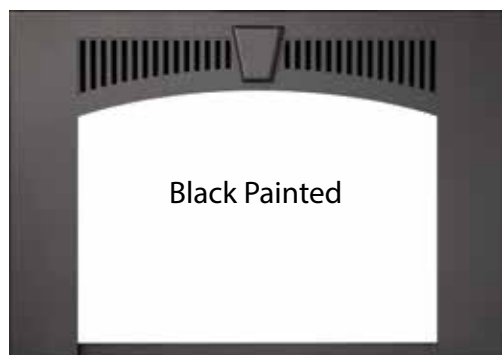

Black Painted


430 and 616 Wilmington™ Face Design:

430 - 31-1/8" W x 22" H

616 - 35-1/2" W x 25-3/4" H

32 DVS & 34 DVL FINISH PANELS

These panels are attached to the insert to accommodate the size variance between the insert face and the size of your existing fireplace opening.

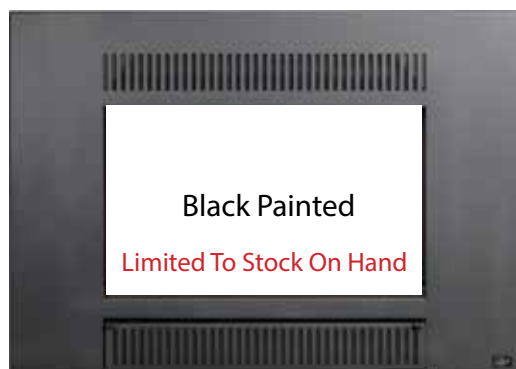

UNIVERSAL FACE (DVS/DVL ONLY)

These faces do not require Finish Panels.


32 DVS

Large: 40-3/8" W x 29" H

34 DVL

Small: 40-5/16" W x 27" H

Large: 44" W x 33 1/2" H

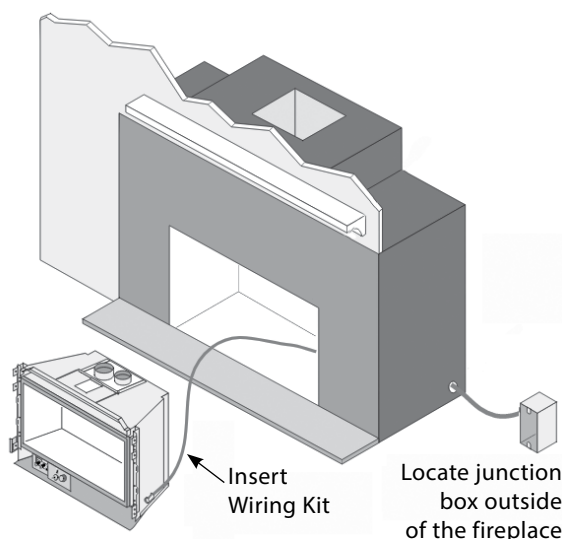

INSERT WIRING KIT

If you do not want the power cord running across your hearth, use our optional U. L. approved Insert Wiring Kit. This kit allows you to have a hard-wired electrical connection within your existing fireplace for a safe and cord free installation.

Available for all gas inserts.

MODEL 32 DVS

One-Piece Finish Panels

Small 38" W x 25" H

Large 40" W x 28-1/2" H



Three-Piece Finish Panels

Top and two sides. Includes Black Trim

MODEL 34 DVL

One-Piece Finish Panels

Small 42" W x 30-1/2" H

Large 44" W x 34" H



One-Piece Finish Panels

Clean look with no seams. Includes Optional Black Trim available that can reduce depth into firebox by 1-1/4".

430 & 616 FINISH PANELS (REQUIRED)

Clean, one-piece panels are available for the 616 and 430 and come in two sizes. Optional Black Trim available that can reduce depth into firebox by 1-1/4".

MODEL 430

38" W x 25" H

40" W x 28-1/2" H

MODEL 616

42" W x 30-1/2" H

44" W x 34" H



Shown 4-Sided Custom Panel with 616 insert

CUSTOM FINISH PANELS

We also offer custom fit three-sided and four-sided finish panels to fit virtually any size fireplace opening. Ask your Lopi® dealer for details.

LOG SET AND MEDIA OPTIONS

Highly Detailed Classic Oak Log Set with Grate
 10 Piece for 32 DVS and 430
 10 Piece for 34 DVL and 616



Highly Detailed Birch Log Set with Grate
 10 Piece for 32 DVS and 430
 10 Piece for 34 DVL and 616



Highly Detailed Driftwood Fyre-Art™
 7 Piece for 32 DVS and 430
 9 Piece for 34 DVL and 616



FIREBACK OPTIONS

Lopi® gas inserts include black painted interiors and a selection of transitional firebacks to customize the interior look of your insert and provide a striking background for the media and glowing flames. Firebacks are required on the 430 and 616 insert models.



All of our Deluxe Gas Fireplace Inserts feature the patented GreenSmart® System. This proprietary system is the most innovative collection of components, controls and technology that when combined provides an elegant, greener and smarter way to heat your home.

GREENSMART® WIRELESS REMOTE CONTROL

- Two Thermostat Modes
- Flame Adjustment (6 levels)
- Change Between GreenSmart® and CPI Pilot Modes
- Fan Operation (6 levels)
- Comfort Control™ (Controls rear burner)
- Accent Lights (6 levels)
- Ember-Glo™



MANUAL SETTING

ON/OFF, Fire and Fan stay where you manually set it.

THERMOSTAT SETTING

Insert turns ON or OFF to maintain your desired home/room temperature.

GREENSMART® THERMOSTAT SETTING

“GreenSmart® Thermostat Mode” automatically adjusts the flame height based on the temperature setting, so the flame will modulate up/down as opposed to shutting OFF/ON like normal thermostats. This setting conserves fuel and maximizes the fireplace inserts heating ability while extending the viewing pleasure of the fire.

CHOICE OF PILOT MODES

Easily Switch Between Pilot Modes:

GreenSmart® Mode

Use in Summer or milder heating days to reduce gas consumption from the Pilot.



CPI - Continuous Pilot Mode

Keeps the Pilot on at all times. This warms the vent system to maintain a strong draft in your chimney and reduce moisture condensation on the glass. Use in CPI mode in Fall/Winter or in cold climate areas.

The GreenSmart® system includes a battery back-up, ensuring proper ignition even during power outages.



FLAME ADJUSTMENT

Adjust the height/heat of the flame. 6 levels of flame heights to choose from.



CONVECTION FANS

Circulate room air around the firebox and deliver heated air into your home. 6 speeds to choose from.




COMFORT CONTROL™

Comfort Control turns off the rear burner while leaving the front burner on for an attractive flame when heat output is not the priority. This feature creates a turn-down ratio of up to 75 percent and offers a more efficient way to heat your home by only burning the correct amount of fuel to keep a constant room temperature.




EMBER-GLO™ FEATURE

Ember-Glo™ combines adjustable halogen under-lighting with colored glass and embers in front of the fire to provide an amazingly realistic ember bed effect. This new dramatic feature is turned on and off with the GreenSmart® Remote Control.



ACCENT LIGHTS

Accent Lights are a standard feature in all Deluxe fireplace inserts. This feature adds a warm glow to both the logs and fireplace interior, and can be used when the fire is on or off.

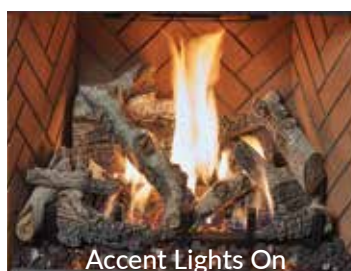

Perfect as a nightlight or soft indirect light for the room, the Accent Lights allow for visual enhancement of your fireplace insert 365 days a year. 6 levels to choose from.

FEATURES & SPECIFICATIONS

MEDIUM

MEDIUM

FEATURES YOU'RE GOING TO LOVE	32 DVS DELUXE	430 DELUXE
Ember-Fyre® II Burner	YES	YES
GreenSmart™ Remote	YES	YES
Comfort Control	YES	YES
Accent Lights	YES (Top, Front Ember-Glo™)	YES (Top, Front Ember-Glo™)
Flex Vent Diameter	3" Exhaust - 3" Air Intake	3" Exhaust - 3" Air Intake
Unit Weight	115 lbs.	106 lbs.
Glass Viewing Area <i>(viewing glass will vary slightly with face design)</i>	24-1/4" W x 12-3/4" H 309 sq. in.	23" W x 16" H 368 sq. in.
Powerful Convection Fans	180 CFM	180 CFM

PERFORMANCE


*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.

Heating Capacity*	Up to 1,500 square feet	Up to 1,500 square feet
BTU Input (NG)	31,000 (high) - 11,300 (low)	31,000 (high) - 9,900 (low)
BTU Input (LP)	31,000 (high) - 9,600 (low)	31,000 (high) - 7,500 (low)
Turn Down Ratio	64% (NG), 69% (LP)	68% (NG), 76% (LP)
Steady State Efficiency Up To (High) <i>Steady State Efficiency determined using maximum venting</i>	85.11% (NG), 87.44% (LP)	85.55% (NG), 86.50% (LP)
Canada Energuide Efficiency <i>FE Efficiency determined using CSA P4.1-15.</i>	75.22% (NG), 77.93% (LP)	73.77% (NG), 74.73% (LP)
AFUE Efficiency	84.10% (NG), 85.40% (LP)	81.80% (NG), 80.70% (LP)

FIREPLACE REQUIREMENTS

Installation information is available at your local dealer or online at www.travisindustries.com

	ONE PIECE PANEL	ONE PIECE PANEL W/TRIM	ONE PIECE PANEL	ONE PIECE PANEL W/TRIM
A = Minimum Height	20-5/8" (524mm)	19-1/2" (496mm)	20-1/4" (515mm)	19-3/4" (502mm)
B = Minimum Width	FRONT 29" (737mm) REAR 18" (458mm)	FRONT 26-1/2" (674mm) REAR 18" (458mm)	30-1/2" (775mm)	30-1/4" (768mm)
C = Minimum Depth	16-3/8" (416mm) 16-7/8" (429mm) W/Arch Faces	15-1/8" (385mm) 15-5/8" (397mm) W/Arch Faces	15-1/2" (394mm)	14-1/4" (357mm)
D = Hearth Extension	0"	1-1/4" (32mm)	0"	1-1/4" (32mm)

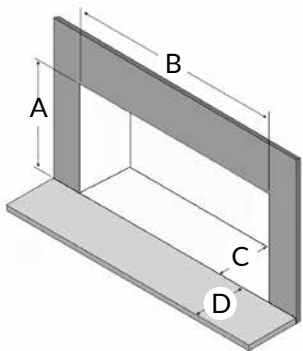

YOUR FIREPLACE


A Height = _____
 B Width Front = _____
 Width Back = _____
 C Depth = _____
 D Hearth = _____
 Extension = _____

SURROUND PANEL SIZES

Measurements for each panel is for maximum fireplace opening coverage. 3 and 4 sided Custom Fit Panels are available from your Fireplace Xtrordinair® or Lopi® dealer.


One Piece Small	38" W x 25" H	38" W x 25" H
One Piece Large	40" W x 28-1/2" H	40" W x 28-1/2" H

32 DVS Deluxe Dimensions

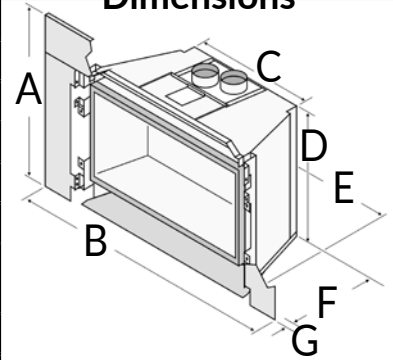

A	Small 25" (635mm) Large 28-1/2" (711mm)
B	Small 38" (965mm) Large 40" (1,016mm)
C	17-5/8" (448mm)
D	19-5/8" (498mm) Front 17" (432mm) Back
E	26-3/8" (671mm) Front 17-5/8" (448mm) Back
F	15-1/8" (384mm)
G	0" with 1 piece panel 1-1/4" (32mm) when using 1 piece panel with trim

430 Deluxe Dimensions

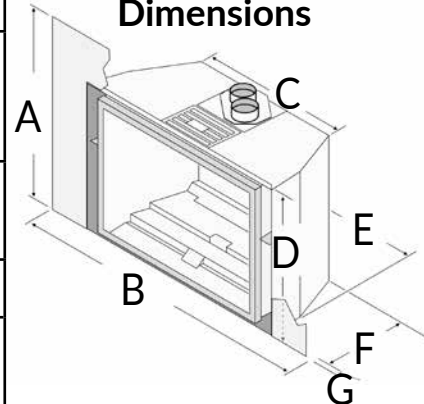

A	Small 25" (635mm) Large 28-1/2" (724mm)
B	Small 38" (966mm) Large 40" (1016mm)
C	21" (534mm)
D	19-1/2" (496mm)
E	29-1/2" (750mm)
F	15" (381mm)
G	0" with 1 piece panel 1-1/4" (32mm) when using 1 piece panel with trim

FEATURES & SPECIFICATIONS

LARGE

LARGE

FEATURES YOU'RE GOING TO LOVE	34 DVL DELUXE	616 DELUXE
Ember-Fyre® II Burner	YES	YES
GreenSmart™ Remote	YES	YES
Comfort Control	YES	YES
Accent Lights	YES (Top, Front Ember-Glo™)	YES (Top, Front Ember-Glo™)
Flex Vent Diameter	4" Exhaust - 3" Air Intake	4" Exhaust - 3" Air Intake
Unit Weight	135 lbs.	133 lbs.
Glass Viewing Area <i>(viewing glass will vary slightly with face design)</i>	27-3/4" W x 17" H 472 sq. in.	27-3/4" W x 19-3/4" H 543 sq. in.
Powerful Convection Fans	180 CFM	180 CFM

PERFORMANCE


*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.

Heating Capacity*	Up to 2,000 square feet	Up to 2,000 Square feet
BTU Input (NG)	40,000 (high) - 13,500 (low)	39,000 (high) - 12,000 (low)
BTU Input (LP)	40,000 (high) - 9,600 (low)	39,000 (high) - 9,000 (low)
Turn Down Ratio	64% (NG), 76% (LP)	69% (NG), 77% (LP)
Steady State Efficiency Up To (High) <i>Steady State Efficiency determined using maximum venting</i>	82.17% (NG), 83.81% (LP)	83.88% (NG), 85.39% (LP)
Canada Energuide Efficiency <i>FE Efficiency determined using CSA P4.1-15.</i>	70.30% (NG), 72.81% (LP)	71.19% (NG), 73.04% (LP)
AFUE Efficiency	75.90% (NG), 77.00% (LP)	74.10% (NG), 73.70% (LP)

FIREPLACE REQUIREMENTS

Installation information is available at your local dealer or online at www.travisindustries.com

	ONE PIECE PANEL	ONE PIECE PANEL W/TRIM	ONE PIECE PANEL	ONE PIECE PANEL W/TRIM
A = Minimum Height	24-7/8" (632mm)	23-3/4" (604mm)	24" (610mm)	23-1/2" (597mm)
B = Minimum Width	FRONT 32-1/2" (826mm) REAR 20" (508mm)	FRONT 31-1/2" (800mm) REAR 20" (508mm)	35" (889mm)	34-5/8" (880mm)
C = Minimum Depth	15-3/4" (400mm) 16-1/4" (413mm) W/Arch Faces	14-1/2" (369mm) 15" (381mm) W/Arch Faces	16-1/2" (420mm)	15-1/4" (387mm)
D = Hearth Extension	0"	1-1/4" (32mm)	0"	1-1/4" (32mm)

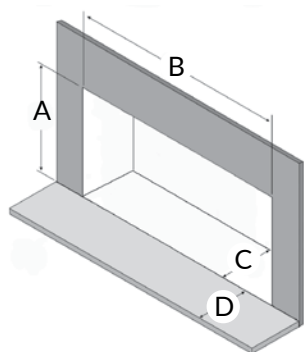

YOUR FIREPLACE


A Height = _____
 B Width Front = _____
 Width Back = _____
 C Depth = _____
 D Hearth = _____
 Extension = _____

SURROUND PANEL SIZES

Measurements for each panel is for maximum fireplace opening coverage. 3 and 4 sided Custom Fit Panels are available from your Fireplace Xtordinaire® or Lopi® dealer.


One Piece Small	42" W x 30-1/2" H	42" W x 30-1/2" H
One Piece Large	44" W x 34" H	44" W x 34" H

34 DVL Deluxe Dimensions

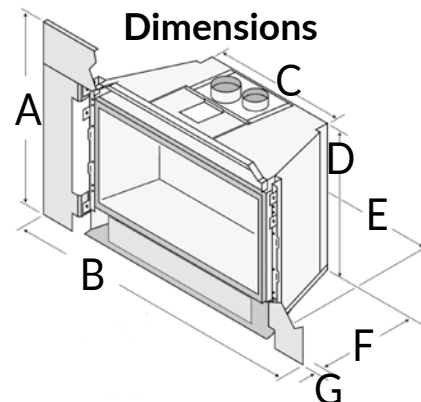

A	Small 30-1/2" (775mm) Large 34" (864mm)
B	Small 42" (1067mm) Large 44" (1118mm)
C	20" (508mm)
D	23-7/8" (543mm) Front 21-3/8" (543mm) Back
E	31-1/2" (801mm)
F	14-1/2" (369mm)
G	0" with 1 piece panel 1-1/4" (32mm) when using 1 piece panel with trim

616 Deluxe Dimensions

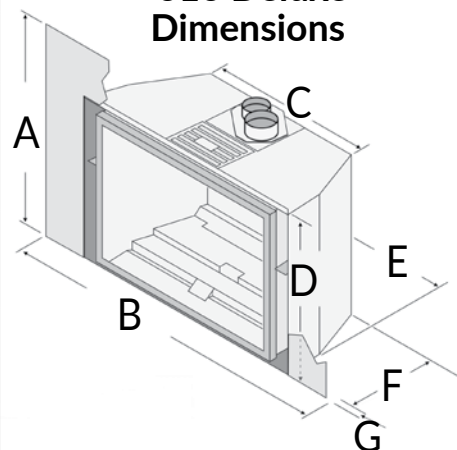

A	Small 30-1/2" (775mm) Large 34" (864mm)
B	Small 42" (1067mm) Large 44" (1118mm)
C	24" (610mm)
D	23-5/16" (592mm)
E	34" (864mm)
F	16" (406mm)
G	0" with 1 piece panel 1-1/4" (32mm) when using 1 piece panel with trim

PROFESSIONAL HEARTH DEALERS

Only the most professional specialty hearth retailers are selected to sell Lopi® inserts. They represent our total commitment to exceptional products and excellent service. In addition, they have successfully completed special training programs in the proper selection, installation, and service of all Lopi® products.

Your professional Lopi® hearth dealers are experts who can advise you on everything from customizing the color of your appliance to selecting appropriate venting and chimney materials.

TESTED & CERTIFIED

ANSI Z21.88-2014/CSA 2.33-2016 "Vented Gas Fireplace Heater", CGA 2.17-M91 (R2009) "Gas Burning Heating Appliances for Manufactured Homes", and CSA P.4.1-15 Testing method for measuring annual fireplace efficiency. We recommend all Lopi® appliances be installed and maintained on an annual basis by your Specialty Hearth Retailer.

Improper installation of your gas appliance or failure to operate it in accordance to the guidelines detailed in the Owner's Manual may negate your warranty and endanger your home and family. Installation information is available on our website at www.LopiStoves.com.




BE YOUR OWN DESIGNER

With our New & Enhanced Design My Fire Web App

Pick your insert, accessories, and extras then snap a photo of your room and upload it to the app to see what your new fire will look like in your room!

Visit our website at

FIREBUILDER.TRAVISINDUSTRIES.COM



Lopi® produces a wide variety of quality wood, pellet, and gas hearth appliances.

Find your favorite fire today by visiting lopiستoves.com


YOUR AUTHORIZED DEALER:



www.Lopistoves.com

Manufactured
By Travis Industries, Inc.
Mukilteo, WA

Lopi® Gas Inserts are protected by one or more of the following patents; U.S. 8,469,021, 7,066,170, 6,602,068, 6,443,726, 6,953,037; Canada 2755517 as well as other U.S. and Foreign Patents pending. Lopi® reserves the right to alter or improve its products at any time without notification. All trademarks belong to Travis Industries. For installation specifications refer to the Owner's Manual found on the Lopi® website.



03/2023 Printed in U.S.A. #98800716